


PERIFLO

ChemTUFF Peristaltic Pump

CT-16 Model

Performance Curve

GPH

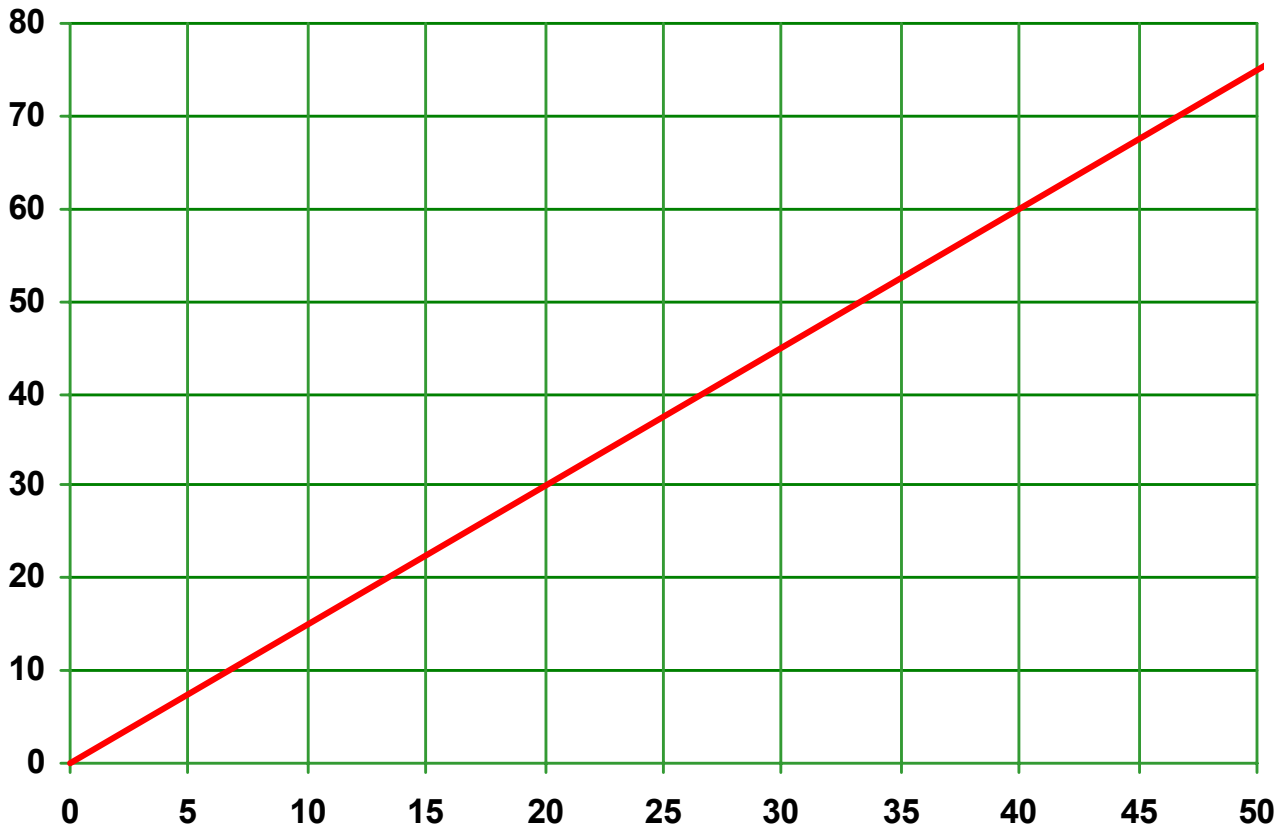

Displacement: .025 gal/rev.

RPM

Maximum Pressure for Continuous Duty	
RPM	PSI
35	116
55	58

HP Required at Max. RPM	
RPM	HP
20	0.25
46	0.33

- * Maximum Operating Pressure for Reinforced Rubber Hoses = 115 psi
- * Maximum Operating Pressure for Norprene or Tygon Tubing = 30 psi